
seria prod. przem. częstotl.

I55BE322F1AV1000MS

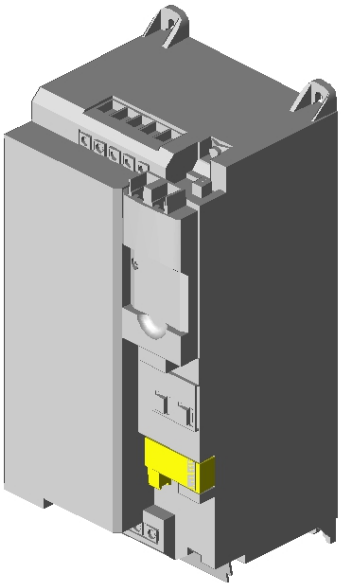

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16648913_3D.stp

16648913_datatable.csv

16648913_datatable.xls

Obsługa myszy w modelu 3D

Obrót | Zmiana wielkości | Przesunięcie



Informacje techniczne o produkcie


seria prod. przem. częstotl.	przemiennik częstotliwościi550
inwerter	i550-C22/400-3
typ	I55BE322F1AV1000MS
moc znamionowa	22 kW/30 HP
moc znamionowa LD	30 kW/40 HP
znamionowe nap. zasilania	3/PE 400/480 V AC
prąd wyjściowy	47/40.4 A
prąd wyjściowy LD	56.4/48.5 A
filtr przeciwzakłóceniowy	zintegrowane
częstotliwość wyjściowa	0-599 Hz
rozszerzenie I/O	standard I/O
sieciowa magistr. przemysłowa	EtherNet/IP
Bezpieczeństwo funkcjonalne	Basic Safety – STO
stopień ochrony	IP20
Miejsce montażu	Szafa sterownicza
software	<6.99
Waga / Jednostka	8.530 KG

15 kW ... 30 kW

The dimensions in mm apply to:

15 kW	I55BE315F
18.5 kW	I55BE318F
22 kW	I55BE322F
30 kW	I55BE330F
Weight	8 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

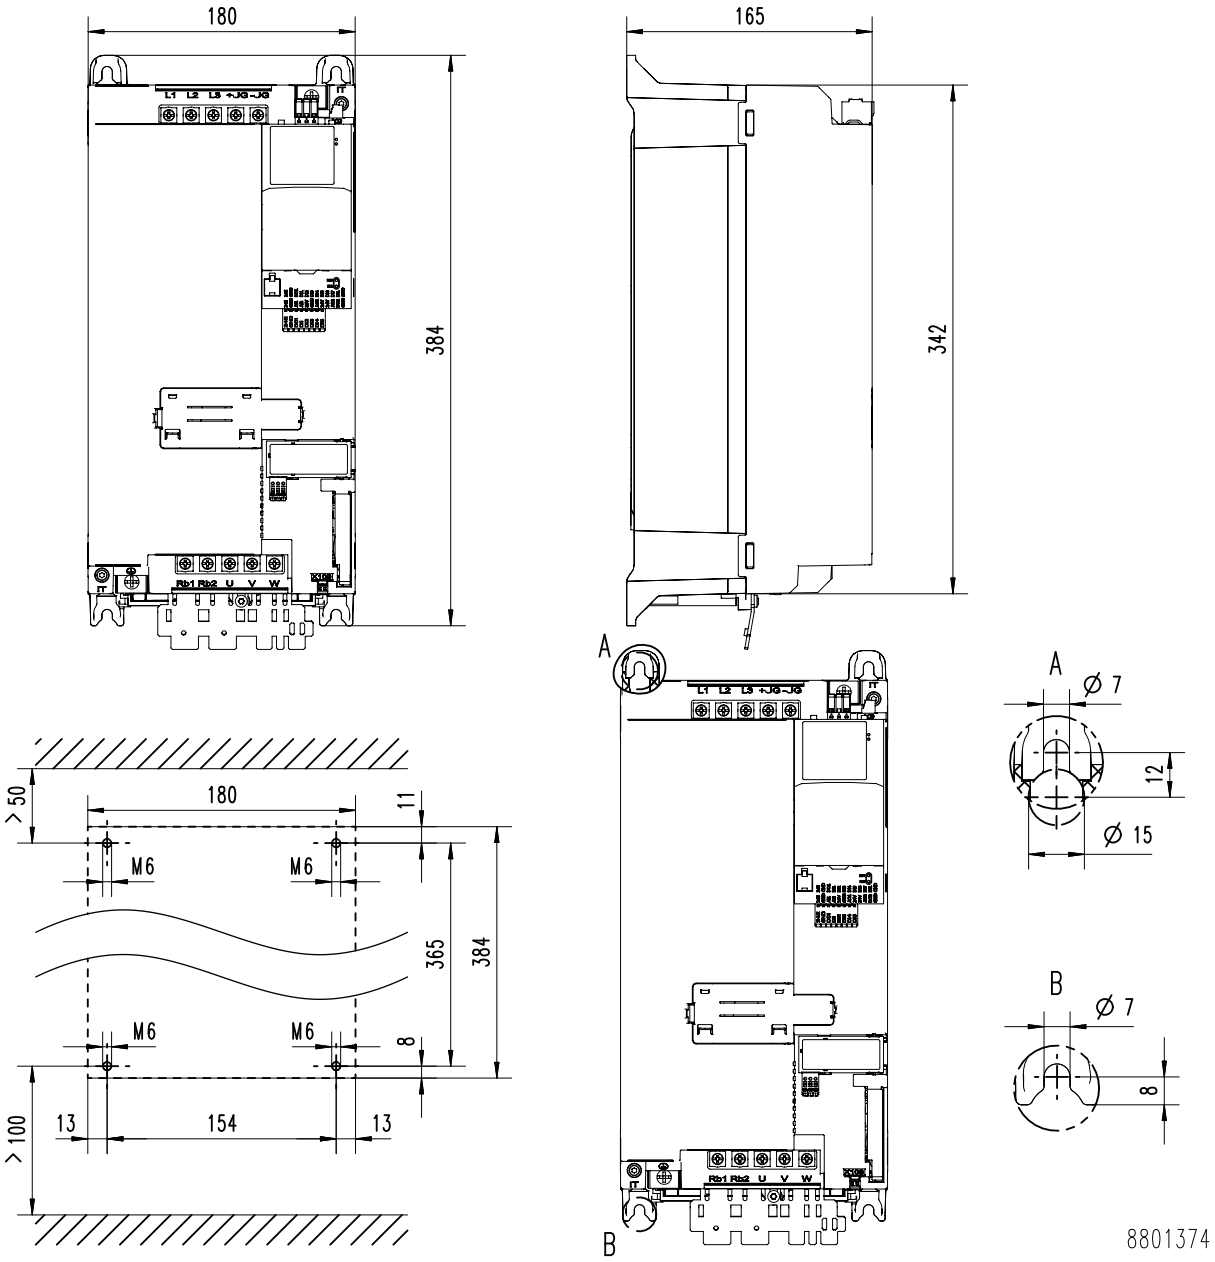

20 hp ... 40 hp

The dimensions in inch apply to:

20 hp	I55BE315F
25 hp	I55BE318F
30 hp	I55BE322F
40 hp	I55BE330F
Weight	17.6 lb

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

