
# seria prod. przem. częstotl.

# I55BE330F1AV1000MS

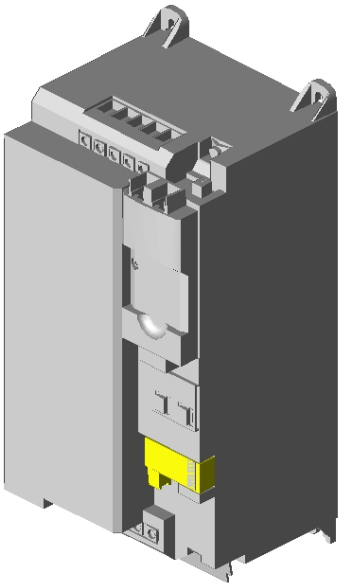

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16648914_3D.stp

16648914_datatable.csv

16648914_datatable.xls

Obsługa myszy w modelu 3D




## Informacje techniczne o produkcie


| | |
|---|---|
| seria prod. przem. częstotl. | przemiennik częstotliwościi550 |
| inwerter | i550-C30/400-3 |
| typ | I55BE330F1AV1000MS |
| moc znamionowa | 30 kW/40 HP |
| moc znamionowa LD | 37 kW/50 HP |
| znamionowe nap. zasilania | 3/PE 400/480 V AC |
| prąd wyjściowy | 61/52 A |
| prąd wyjściowy LD | 73.2/62.4 A |
| filtr przeciwzakłóceniowy | zintegrowane |
| częstotliwość wyjściowa | 0-599 Hz |
| rozszerzenie I/O | standard I/O |
| sieciowa magistr. przemysłowa | EtherNet/IP |
| Bezpieczeństwo funkcjonalne | Basic Safety – STO |
| stopień ochrony | IP20 |
| Miejsce montażu | Szafa sterownicza |
| software | <6.99 |
| Waga / Jednostka | 8.530 KG |

**15 kW ... 30 kW**

The dimensions in mm apply to:

| | |
|---|---|
| 15 kW | I55BE315F |
| 18.5 kW | I55BE318F |
| 22 kW | I55BE322F |
| 30 kW | I55BE330F |
| Weight | 8 kg |

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

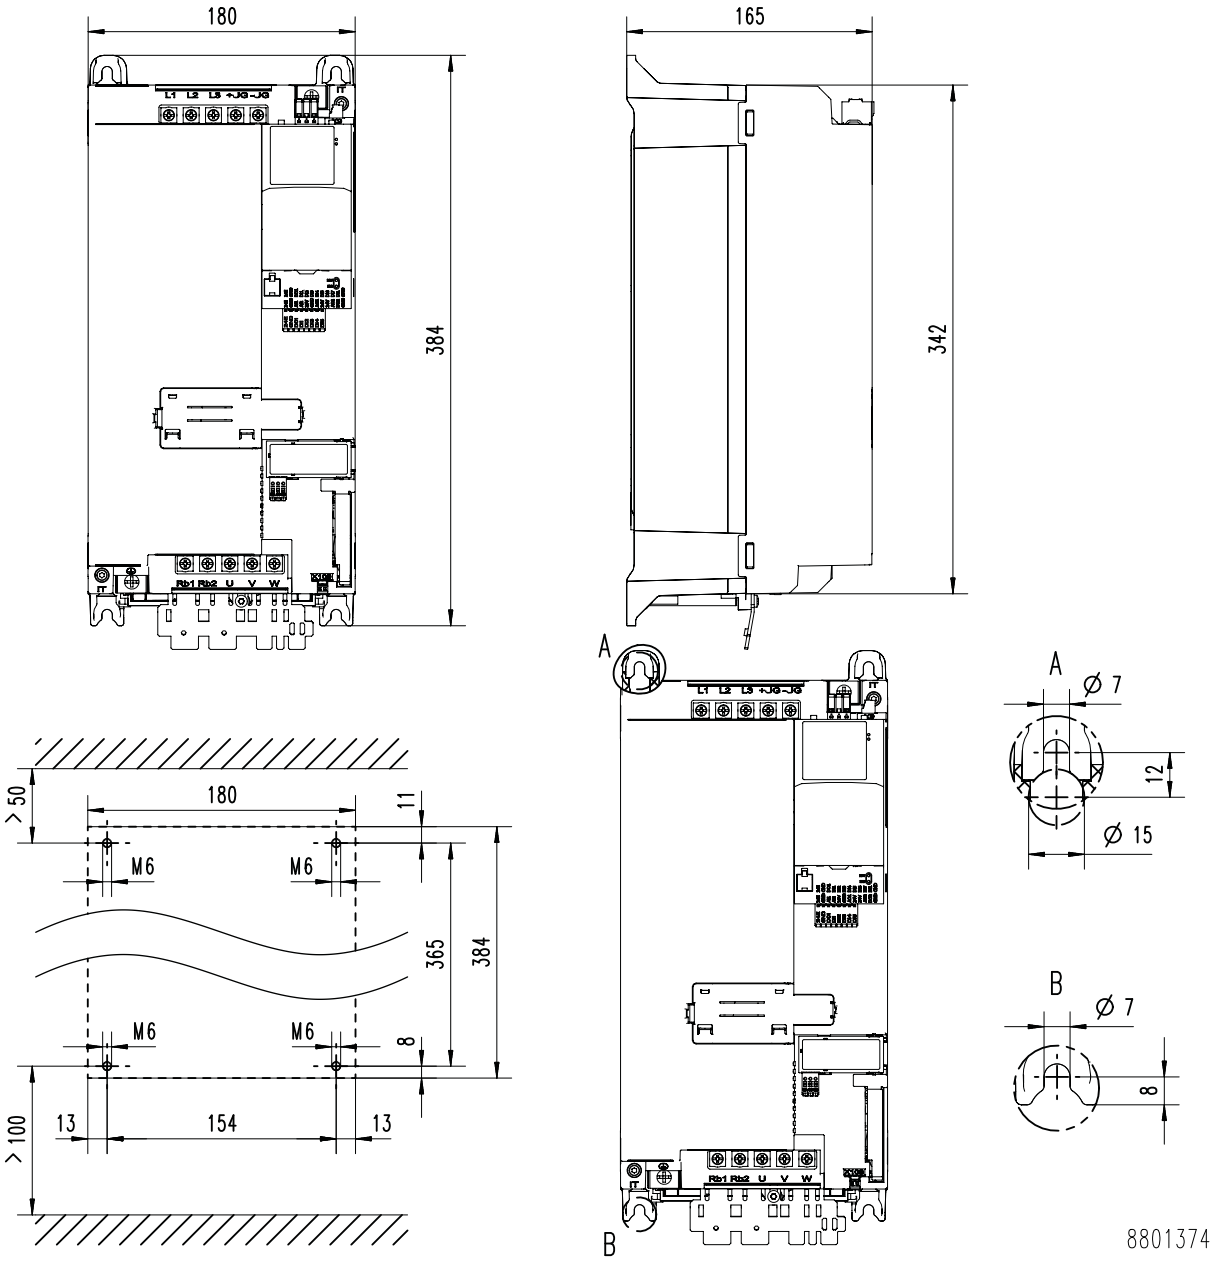

**20 hp ... 40 hp**

The dimensions in inch apply to:

| | |
|---|---|
| 20 hp | I55BE315F |
| 25 hp | I55BE318F |
| 30 hp | I55BE322F |
| 40 hp | I55BE330F |
| Weight | 17.6 lb |

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

