
przemiennik częstotliwościi550

I55AE137F1AV1000KS

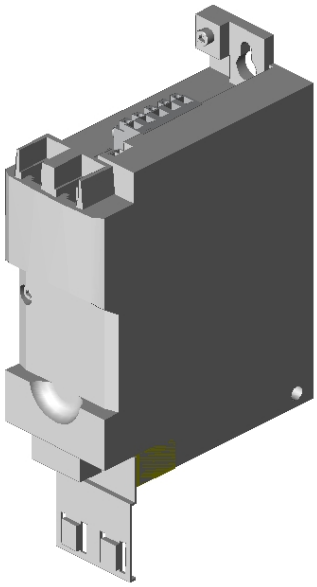

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16483116_3D.stp

16483116_datatable.csv

16483116_datatable.xls

Obsługa myszy w modelu 3D

Obrót | Zmiana wielkości | Przesunięcie

Informacje techniczne o produkcie

przemiennik częstotliwościi550


inwerter	**i550-C0.37/400-3**
typ	**I55AE137F1AV1000KS**
moc znamionowa	0.37 kW/0.5 HP
znamionowe nap. zasilania	3/PE 400/480 V AC
prąd wyjściowy	1.3/1.1 A
filtr przeciwzakłóceniowy	zintegrowane
częstotliwość wyjściowa	0-599 Hz
rozszerzenie I/O	standard I/O
sieciowa magistr. przemysłowa	EtherCAT
Bezpieczeństwo funkcjonalne	Basic Safety – STO
stopień ochrony	IP20
Miejsce montażu	Szafa sterownicza
Waga / Jednostka	1.010 KG


0.25 kW ... 0.37 kW


The dimensions in mm apply to:


0.25 kW	I55AE125B	I55AE125D	
0.37 kW	I55AE137B	I55AE137D	I55AE137F
Weight	0.8 kg	0.8 kg	0.8 kg


Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

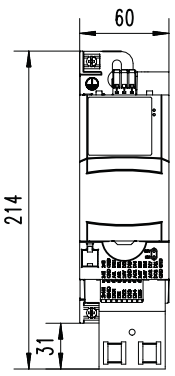

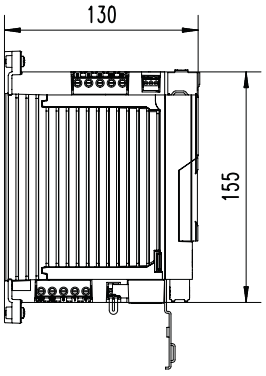

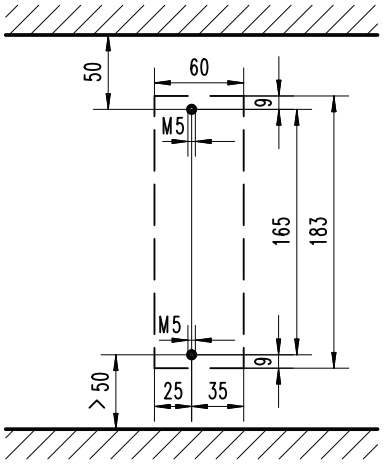



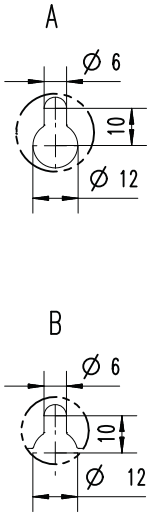


8800263


0.33 hp ... 0.5 hp


The dimensions in inch apply to:


0.33 hp	I55AE125B	I55AE125D	
0.5 hp	I55AE137B	I55AE137D	I55AE137F
Weight	1.8 lb	1.8 lb	1.8 lb


Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

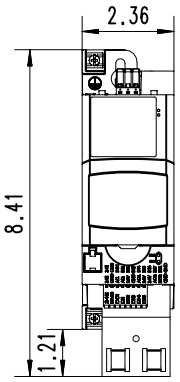


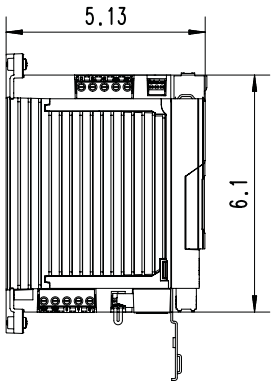

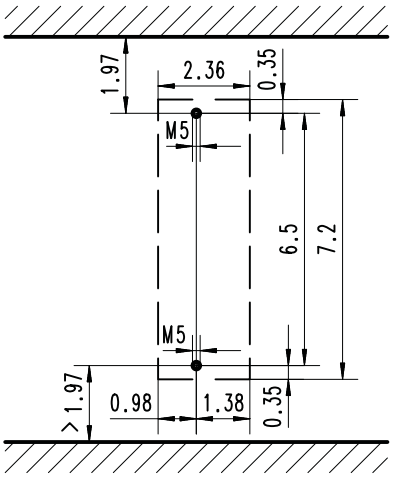







8800298